

# ColorStrip LED lights



user guide

## The Ultimate Home Experience

Give your home living room a unique atmospheric twist with the ColorStrip LED lights by tzumi. Designed with a safe adhesive backing, this colorful backlight can be fixed directly onto the back of your TV or computer screen, enhancing your home theater and easing light-induced fatigue. It fits screens up to 65" and includes a wireless remote controller, which provides you with the freedom to customize your selection of 16 colors and find the perfect brightness, rhythm, and color scheme.

- 16 Color Selection
- Adjustable Color Intensity & Brightness Via Remote Control
- Relieve Eyes From Fatigue
- Create Ambiance & Unique Atmosphere

1

## PRODUCT OVERVIEW

### Wireless Remote Control




CR2025 cell battery (included)

When Remote Control operation becomes slow, it is time to change the battery. Compatible with CR2025 and CR2032 battery types.

2

## INSTALLATION


NOTE: Please make sure that the back surface of your TV is clean from dust, oils, or fingerprints before attempting to apply your LED Mood Light. Use an alcohol-based cleaning cloth to wipe the back of your TV.

1. Locate the USB port on the back of your TV. If your TV does not have a USB port, you may use any other USB power source. 
2. Make sure that you are satisfied with the coverage area of the LED strip prior to peeling off the adhesive tape. Make sure that the USB cable is placed near the USB port and has enough slack to reach safely. The Remote Receiver must also be visible in order to work properly. See below.
3. Peel off the backing of the strip to expose the adhesive.
4. Apply to the cleaned surface of the back of TV. Press down for a couple of seconds to secure.
5. Connect the LED Strip with the USB Cable and insert the cable into the USB port.
6. Once connected, remove the protective plastic strip from remote control to activate the battery.
7. Press the ON button to turn on the LED strip.
8. Refer to the color combinations settings on the remote to customize your LED strip.

over → 3

## ASSEMBLY

See below for suggested placement depending on your TV size:

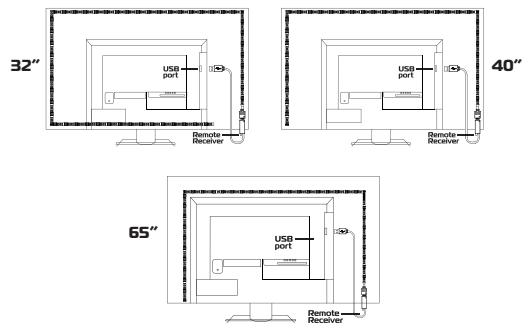

4

## WIRELESS REMOTE CONTROLS

Buttons 1 and 2 can be used to control the effects and speed of Buttons 6, 7, 8, 9.



### REMOTE SPECS

Coverage Area:  
up to 26 feet (8m) max  
Battery Type:  
CR2025 cell battery

1. Brightness (UP) / Flash Control (QUICK)
2. Brightness (DOWN) / Flash Control (SLOW)
3. Power Off
4. Power ON
5. LED color buttons  
16 colors
6. Flash (Changes Instantly) Red > Green > Blue
7. Strobe (Changes Gradually) Red > Green > Blue
8. Fade (Changes Gradually) Red > Green > Blue > Yellow > Light green > Purple > White
9. Smooth (Changes Instantly) Red > Green > Blue > Yellow > Purple > Light Green > White

5

## LED LIGHT STRIP SPECS

LED Strip  
Input: DC 5V/0.5A ~ 2A;  
Power Consumption: 2.5w ~ 10W  
LED Chip: 5050, RGB  
Color: 16 colors with 4 Mood light settings  
Beam Angle: 120 degrees  
LED Strip: 60 LED lights / 6.5 foot (78")  
Back Adhesive: self adhesive  
Working Temperature: -20°C ~ 45°C  
Working Humidity: 0% ~ 80% RH

6

## IMPORTANT SAFEGUARDS

- Keep LED strip away from flammable objects.
- Always make sure that all parts have been connected properly to avoid short circuit.
- Check to make sure the voltage of the power source (USB) is 5V.
- Do not connect the LED strip to the power source until all of the installation have been completed.
- Do not cut any part of the LED strip or its connectors.
- Always make sure that the Remote Receiver is not covered or blocked. This will ensure proper operation using the remote control.
- If this product malfunctions, please do not try to repair it yourself, take it to a qualified electrician.



tzumi® Inc. Distributed by tzumi Inc. NY, NY 10016.  
©Copyright 2021 tzumi Inc. All Rights Reserved. Made in China. Other trademarks and trade names are those of their respective owners. Subject to change without prior notice.

7